 <p style="text-align: center;">State of Ohio Weatherization Program Standards</p>	Section	BUILDING SHELL FINAL INSPECTION
	Subject	Overall Building Shell

EXTERIOR HOUSE INSPECTION 402-1.1

Ensure that the gutter and downspout system, if present, is working effectively. Ensure that water is not running into or under the house. **drainage**
402-1.1a

INTERIOR INSPECTION 402-1.2

Ensure that the foundation information is correct. **foundation**
402-1.2a

Ensure that noted hazards or problems have been corrected or documented. **foundation area hazards**
402-1.2b

Perform a final blower door test (see 1506-1). Ensure that the target reduction goal has been met or surpassed. Verify the valid technical reason(s) that prevented the goal from being achieved, and ensure that they are documented and placed in the client file. **blower door test and target**
402-1.2c

Ensure that the Building Tightness Limit (BTL) minimum level of air leakage is available within the home. **Building Tightness Limit (BTL)**
402-1.2d

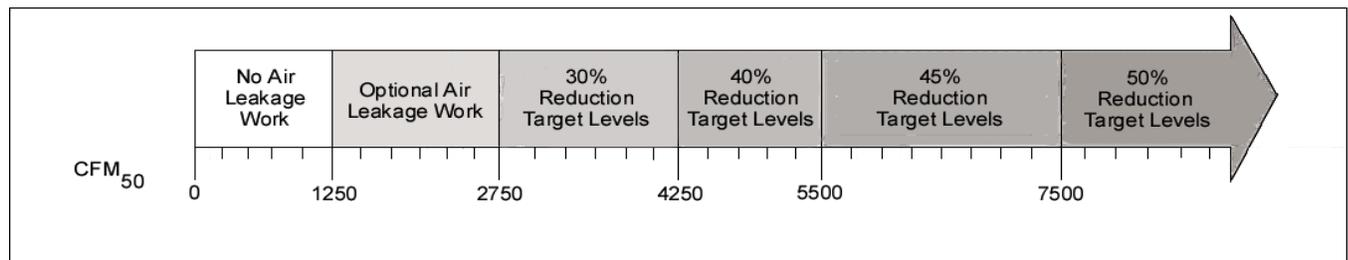


Figure 402-12.d OVERALLS Scale

Ensure that the forced-air system register locations are documented. **register locations**
402-1.2e

Ensure that the pressure pan readings are acceptable (see 1506-5). **pressure pan test**
402-1.2f